
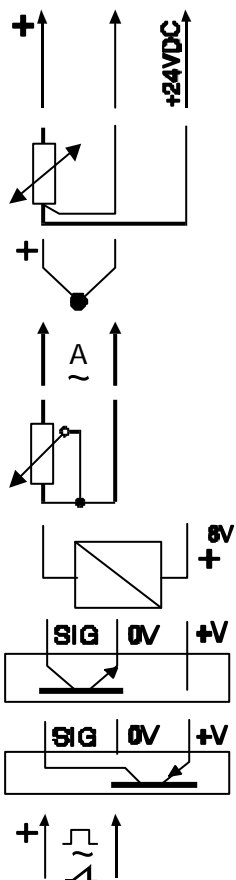
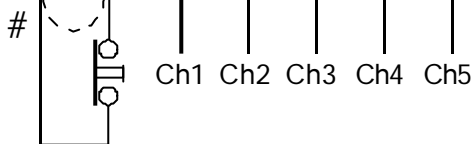


INDIVIDUAL
N/O or N/C CONTACT
OUTPUTS (8A/250V)

0V reference for trip adjust. (Terminal 15)

External reset pushbutton. [Terminal 14 & 15]
Use link if not used.
Remove link to disable latch.

A.P.C.S.

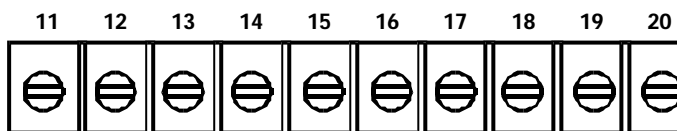

INPUTS

HIGH LEVEL SIGNALS -
mADC, mVDC, VDC
2 or 3-WIRE INPUTS
[24V AUX]

RTD, Pt100 (3-WIRE)

THERMOCOUPLE

AC CURRENT

2-WIRE RESISTANCE
SLIDEWIRE
POTENTIOMETER

2-WIRE NAMUR,
CONTACT

3-WIRE NPN

3-WIRE PNP

EXTERNALLY SOURCED
PULSE SINE SIGNAL